


Heraklith® | Metal screw

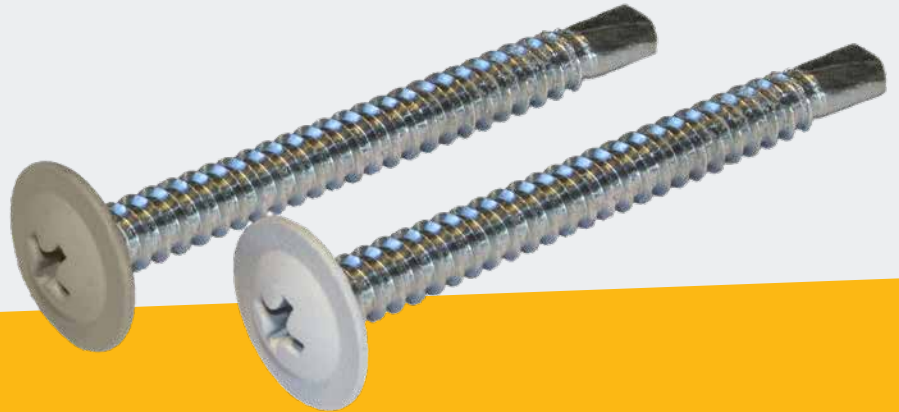

Heraklith® | Metal screw is specifically suited for fixing solid wood wool panels to metal CD profiles. The metal screw is made of galvanized steel with a standard C2 corrosion class surface treatment. The screws have a decorative matt powder coat finish and are available as standard in white and natural shade. Other RAL colours are available upon request.


Advantages

- Stalen schroefkop met matte poedercoating voor decoratieve afwerking
- Steel screw head with matt powder coating as a decorative finish
- Simple installation: no pre-drilling necessary
- Special drill tip for quick installation in metal profiles
- Minimal anchorage depth
- Standard C2 corrosion class
- Available in the colours nature tone and white (other colours on request)

Application range

Suited for mounting wood wool panels to metal CD profiles, both indoors and outdoors (not directly exposed to the elements), such as parking garages, bottom of balconies, porticoes, technical areas and basements.


The required number of screws and positioning depend on the type of panel and the dimensions of the panel (see processing instructions on www.heraklith.co.uk/content/downloads-documents). The required anchor depth of the screws is at least 10 mm.

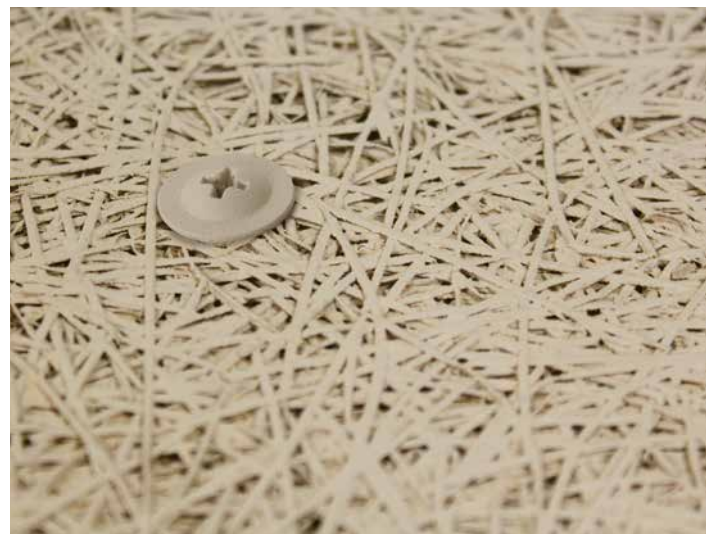

Metal screw

Technical specifications

Corrosion category	C2
Head diameter	12 mm
Head thickness	2.5 mm
Screw diameter	4.8 mm
Minimum anchoring depth	10 mm
Screw drive	Philips PH2
Recommended anchoring material	Metal
maximum material thickness	0.6 - 2.0 mm

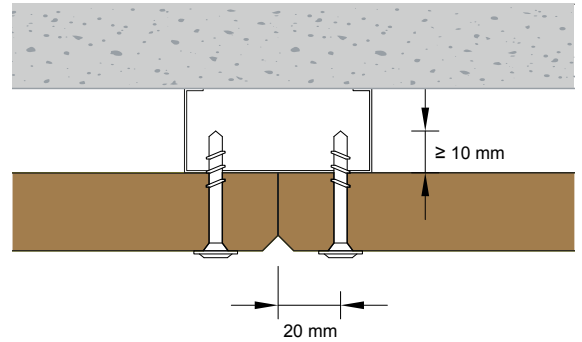

Metal screw range

Art. No. Nature tone	Art. No. White	Screw length (mm)	Panel thickness to (mm)	Units / pack
609452	609453	38	25	200
610420	610419	50	35	200
610422	610421	70	50	200

Different colours upon request