

# WOOD SCREW

## DESCRIPTION

Heraklith® | Wood screws are specifically suited for mounting solid wood wool panels to wooden structures.

## STANDARD VERSION

The wood screw is made of galvanized steel with a standard surface treatment in corrosion class C2. The screws have a matt powder-coated decorative finish and come standard in the colours white and nature tone (RAL 1015).



## ADVANTAGES

- ✓ Simple installation: no pre-drilling necessary
- ✓ Special drill tip for quicker installation and to prevent wood splitting
- ✓ Minimal anchorage depth
- ✓ C4 corrosion class available upon request
- ✓ Available in various RAL colours upon request

## SPECIFICATIONS

| Art. No. Nature tone | Art. No. White | Screw length (mm) | Panel thickness to (mm) | Units / pack |
|----------------------|----------------|-------------------|-------------------------|--------------|
| 596718               | 596724         | 50                | 25                      | 200          |
| 596720               | 596726         | 60                | 35                      | 200          |
| 596722               | 596727         | 80                | 55                      | 200          |
| 596723               | 596728         | 100               | 75                      | 200          |

Different colours upon request



Always process our Heraklith wood wool panels according to our processing instructions. These can be found on [heraklith.co.uk/downloads](http://heraklith.co.uk/downloads)




[www.heraklith.co.uk](http://www.heraklith.co.uk)

## TECHNICAL SPECIFICATIONS

|                                 |                              |
|---------------------------------|------------------------------|
| Corrosion class                 | C2, >15 years (120h)*        |
| Head diameter                   | 14 mm                        |
| Head thickness                  | 2.5 mm                       |
| Screw diameter                  | 6.0 mm                       |
| Minimum anchorage depth in wood | 1/3 screw length (min 25 mm) |
| Screw drive                     | Torx T30                     |
| Recommended anchoring material  | Wood                         |

\* Optionally available in:

- C4, >15 years (1000h)
- C5, 5-15 years (2000h)

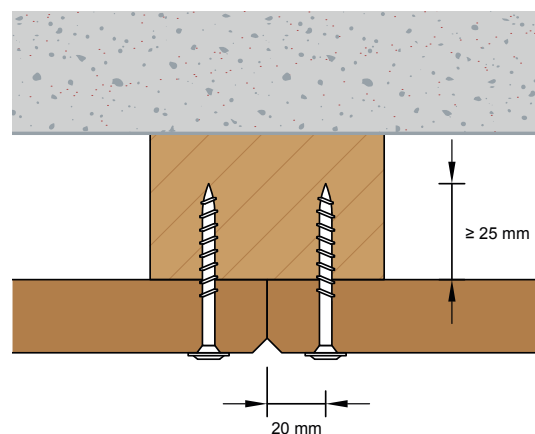

| Durability | Corrosion class (ISO 12944-2) |     |     |      | Unit                      |
|------------|-------------------------------|-----|-----|------|---------------------------|
|            | C2                            | C3  | C4  | C5   |                           |
| 2-5 years  | -                             | 120 | 240 | 720  | h (salt spray test hours) |
| 5-15 years | -                             | 240 | 480 | 1440 |                           |
| > 15 years | -                             | 480 | 720 | 2160 |                           |

**Do you want more information? Please contact us**

### Knauf Insulation B.V.

PO Box 375  
4900 AJ Oosterhout  
The Netherlands

Tel: + 31 (0)162 - 42 12 45  
e-mail: [customerservice.nl@knaufinsulation.com](mailto:customerservice.nl@knaufinsulation.com)

[www.heraklith.nl](http://www.heraklith.nl)

Our general sales and delivery conditions apply to all our offers, communications and agreements, notwithstanding any provision to the contrary that can be found on our order forms or elsewhere. An overview of our general terms and conditions can be found on: [heraklith.co.uk/downloads](http://heraklith.co.uk/downloads). Extreme caution was observed when putting together and processing the information, texts and illustrations in this document. Nevertheless, errors cannot quite be ruled out. The publisher and editors cannot assume legal responsibility or any liability whatever for incorrect information and the consequences thereof.

V5-EN 01/2020

Heraklith® is a registered trademark of

**KNAUFINSULATION**